

Splitter Panels




Standard and Customised Solutions

PRODUCT FEATURES

- Customised
- Wall-, floor-, combiner- and 19" rackmounted
- For FM, DAB, VHF and UHF
- Easy-switched links

PRODUCT PROFILE

Exir Broadcasting offers patch splitter panels with various numbers of ports, and in most types and dimensions. A number of standard models are available as listed below, but normally units are unique and designed according to customer specifications. The panels are constructed with sturdy frames for mounting either on the floor, on combiner units, on the wall or in a 19" rack. Available with directional couplers and micro switch (interlock).

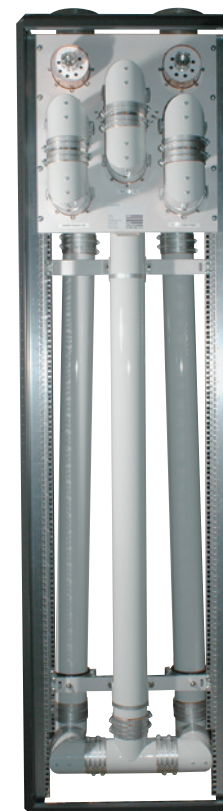

SPLITTER PANELS All versions are available with interlocking on request. Customised versions on request.						
ARTICLE	DIMENSION	PORTS	POWER @max freq.	SPLITTER	FRAME / RACK	FREQUENCIES
BAND II						
ULS2-158R-AB00	1 5/8"	6-ports	15 kW	T-splitter	19" rack mounted	87 - 108 MHz
ULS2-158R-AA00	1 5/8"	11-ports	15 kW	3dB-coupler	Frame mounted	87 - 108 MHz
ULS2-318R-AA00	3 1/8"	6-ports	44 kW	T-splitter	19" rack mounted	87 - 108 MHz
ULS2-318R-AB00	3 1/8"	6-ports	44 kW	T-splitter (8 MHz BW)	19" rack mounted	87 - 108 MHz
ULS2-098R-AA00	RL98	6-ports	68 kW	3dB-coupler	19" rack mounted	87 - 108 MHz
ULS2-098R-AB00	RL98	6-ports	68 kW	T-splitter	19" rack mounted	87 - 108 MHz
ULS2-618R-AA00	6 1/8"	6-ports	200 kW	T-splitter	Frame mounted	87 - 108 MHz
BAND IV/V						
ULS4-R158-AA00	1 5/8"	6-ports	5 kW	3dB-coupler	Frame mounted	470 - 862 MHz
ULS4-158R-AE00	1 5/8"	6-ports	5 kW	3dB-coupler	19" rack mounted	470 - 862 MHz
ULS4-158R-AG00	1 5/8"	6-ports	5 kW	T-splitter	19" rack mounted	470 - 862 MHz
ULS4-158R-AF00	1 5/8"	7-ports	5 kW	T-splitter	19" rack mounted	470 - 862 MHz
ULS4-R318-AA00	3 1/8"	6-ports	15 kW	T-splitter	19" rack mounted	470 - 862 MHz
ULS4-318R-AB00	3 1/8"	7-ports	15 kW	T-splitter	19" rack mounted	470 - 862 MHz
ULS4-098R-AE00	RL98	6-ports	24 kW	3db-coupler	Combiner mounted	470 - 862 MHz
ULS4-098R-AH00	RL98	6-ports	24 kW	T-splitter	(19" rack mounted)	470 - 862 MHz
ULS4-098R-AF00	RL98	7-ports	24 kW	T-splitter	(19" rack mounted)	470 - 862 MHz
ULS4-098R-AG00	RL98	11-ports	24 kW	T-splitter	(19" rack mounted)	470 - 862 MHz
ULS4-412R-AA00	4 1/2"	8-ports	26 kW	T-splitter	Frame mounted	470 - 862 MHz
ULS4-R120-A0	Nax120	6-ports	36 kW	3dB-coupler	Combiner mounted	470 - 862 MHz
ULS4-R120-AC00	Nax120	6-ports	36 kW	T-splitter	Frame mounted	470 - 862 MHz
ULS4-120R-AD00	Nax120	8-ports	36 kW	T-splitter	Frame mounted	470 - 862 MHz