


UHF Stretch Line Combiner

2 x 2.5 kW Peak Sync, Single

BAND IV-V

10 year GUARANTEE

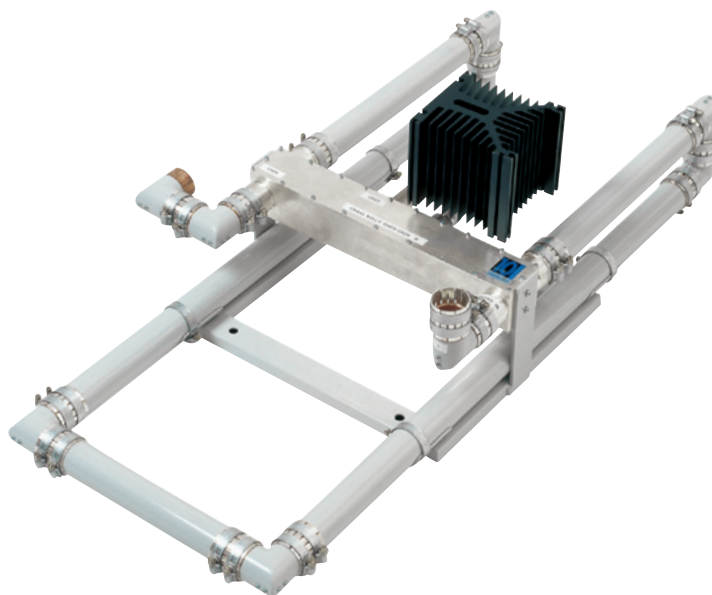


PRODUCT FEATURES

- High isolation
- Low insertion loss
- Dry absorbers
- Cost-effective solution
- 10-year comprehensive warranty

PRODUCT PROFILE

Exir Broadcasting Stretch Line combiners are very dependable and provide a cost-effective alternative for combining without the use of proper bandpass filters.

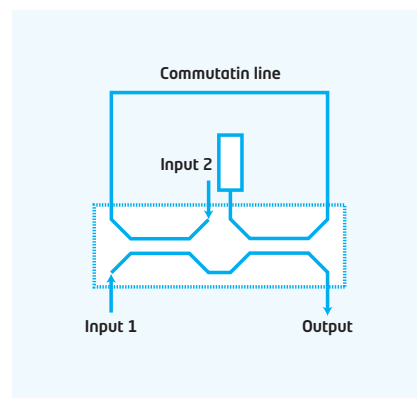

ARTICLE	COM4-05TL-A013	COM4-05TL-A016
FREQUENCY	470 - 860 MHz	470 - 860 MHz
MAXIMUM OUTPUT POWER	5 kW Peak Sync + sound 0.5 kW	5 kW Peak Sync + sound 0.5 kW
MAXIMUM INPUT POWER / CHANNEL	2.5 kW Peak sync + sound 0.25 kW	2.5 kW Peak Sync + sound 0.25 kW
IMPEDANCE	50 Ohm	50 Ohm
VSWR	<1.05 (>32 dB)	<1.05 (>32 dB)
INSERTION LOSS	>4 channels space; <0.3 dB 3 channels space; <0.5 dB	>9 channels space; <0.3 dB 9 channels space; <0.5 dB
ISOLATION	>45 dB	>45 dB
MINIMUM CHANNEL SPACING	3 channels	9 channels
STANDARD CONNECTION	EIA 1 5/8 unflanged, 7/8 F, 7/16	EIA 1 5/8 unflanged, 7/8 F, 7/16
DIMENSIONS	max 700 x 460 x 670 mm (27.6 x 18 x 26.4 in)	max 700 x 460 x 670 mm (27.6 x 18 x 26.4 in)
WEIGHT	~40 kg (88.2 lb)	~40 kg (88.2 lb)