


UHF Stretch Line Combiner

2 x 20 and 2 x 10 kW Peak Sync, Single

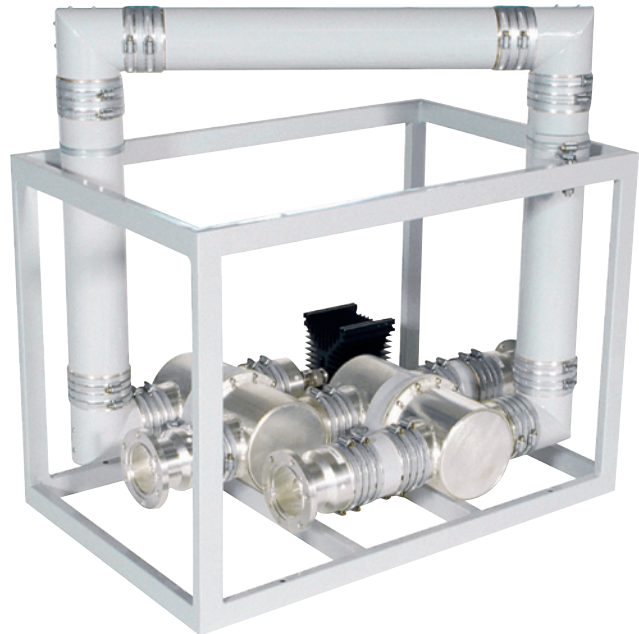


PRODUCT FEATURES

- High isolation
- Very low losses
- Dry absorbers
- No forced air cooling
- Cost-effective solution
- 10-year comprehensive warranty

PRODUCT PROFILE

Exir Components Stretch Line combiners are very dependable and provide a cost-effective alternative for combining without the use of proper bandpass filters.

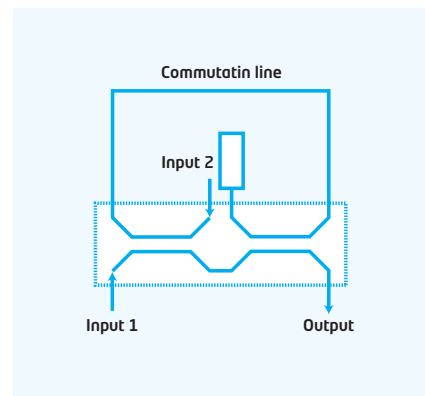

ARTICLE	COM4-0STL-A010	COM4-0STL-A003
FREQUENCY	470-860 MHz	470-860 MHz
MAXIMUM OUTPUT POWER	40 kW Peak Sync	20 kW Peak Sync
INPUT POWER (at 25°C)	2 x 20 kW vision + 2 x 2 kW sound and NICAM	2 x 10 kW vision + 2 x 1 kW sound and NICAM
IMPEDANCE	50 Ohm	50 Ohm
VSWR	<1.05 (>32 dB)	<1.05 (>32 dB)
INSERTION LOSS	>4 channels space; <0.3 dB 3 channels space; <0.5 dB	>4 channels space; <0.3 dB 3 channels space; <0.5 dB
ISOLATION	>36 dB	>36 dB
MINIMUM CHANNEL SPACING	3 channels	3 channels
STANDARD CONNECTION	RL98 unflanged or flanged	EIA 3 1/8 unflanged or flanged
DIMENSIONS	860 x 550 x 800 mm (34 x 22 x 32 in) depending on channel	517 x 741 x 600 mm (20 x 29 x 24 in) depending on channel
WEIGHT	~50 kg (110 lb)	~45 kg (99 lb)